

AccentPLUS[®] 1

**Uncompromisingly clean sound
at a price that's music to your ears.**


Acoustic clarity doesn't have to come at a high price. For an extraordinary listening experience, NuVo offers the AccentPLUS[®]1 in-wall and in-ceiling speakers. AccentPLUS[®]1 speakers deliver crisp, clear audio throughout your home, perfect for casual listening and background ambience.

For impressively full, impeccably clean sound and an audio experience that is never compromised, you can trust AccentPLUS[®]1 speakers to fill every room of your home with bright, rich music.

AccentPLUS[®]1 Features:

- Durable butyl rubber surround
- 6.5 or 8 inch Polypropylene cone
- 30° pivoting silk-domed tweeter
- 12 dB crossover
- Anti-debris basket
- Paint friendly, low-profile aluminum grill

A durable, butyl rubber surround provides years of high performance. The polypropylene cone delivers superior sound reproduction and the pivoting silk-domed tweeter produces precise, high-range tones.

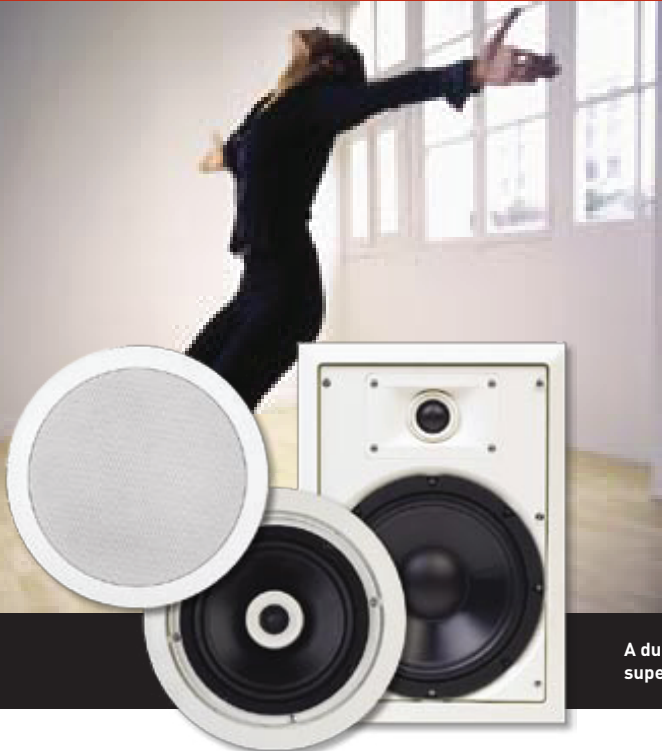

SYSTEM	NV-AP16C	NV-AP16CS	NV-AP18C	NV-AP16I	NV-AP18I
Description:	6.5" Ceiling Speaker with Co-axial Pivoting Tweeter	6.5" Stereo Ceiling Speaker with Dual Fixed Tweeter	8.0" Ceiling Speaker with Co-axial Pivoting Tweeter	6.5" In-Wall Speaker with Pivoting Tweeter	8.0" In-Wall Speaker with Pivoting Tweeter
Power Rating:	50W	50W	60W	50W	60W
Impedance:	8 ohm	8 ohm x 2	8 ohm	8 ohm	8 ohm
Efficiency:	91dB 1W/1M	91dB 1W/1M	92dB 1W/1M	91dB 1W/1M	92dB 1W/1M
Frequency Response:	50Hz-20kHz	50Hz-20kHz	50Hz-20kHz	50Hz-20kHz	50Hz-20kHz
Tweeter Crossover:	12dB / Octave; 4kHz	12dB / Octave; 4kHz	12dB / Octave; 4kHz	12dB / Octave; 4kHz	12dB / Octave; 4kHz
Woofer Crossover:	None	None	None	12dB / Octave; 4kHz	12dB / Octave; 4kHz
Dimensions (HxWxD):	9" Diameter x 3.75" (228mm Diameter x 96mm)	9" Diameter x 3.75" (228mm Diameter x 96mm)	10.75" Diameter x 4.375" (272mm Diameter x 112mm)	12" x 8.75" x 3.75" (306mm x 220mm x 95mm)	14.125" x 10" x 4" (358mm x 256mm x 101mm)
Cutout Dimensions:	8" (204mm)	8" (204mm)	9.75" (248mm)	11.125" x 7.75" (284mm x 198mm)	13.25" x 9.125" (336mm x 232mm)
Depth:	3" (75mm)	3" (75mm)	3.375" (86mm)	3" (75mm)	3.375" (86mm)
WOOFER					
Magnet:	10 oz (80mm x 30mm x 15mm)	10 oz (80mm x 3mm x 15mm)	20 oz (100mm x 45mm x 15mm)	10 oz (80mm x 30mm x 15mm)	20 oz (100mm x 45mm x 15mm)
Voice Coil:	1.0" (25mm) Polyimide Film	1.0" (25mm) Polyimide Film	1.5" (38mm) Polyimide Film	1.0" (25mm) Polyimide Film	1.5" (38mm) Polyimide Film
Cone:	Etched Polypropylene	Etched Polypropylene	Etched Polypropylene	Etched Polypropylene	Etched Polypropylene
Surround:	Butyl Rubber	Butyl Rubber	Butyl Rubber	Butyl Rubber	Butyl Rubber
Dust Cover:	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene
TWEETER					
Magnet:	Neodymium	Neodymium	Neodymium	Neodymium	Neodymium
Dome:	20mm Silk	2 x 13mm Mylar	25mm Silk	20mm Silk	25mm Silk
Type:	Pivoting 30 degrees	Fixed Position	Pivoting 30 degrees	Pivoting 30 degrees	Pivoting 30 degrees



Associated Telephone Industries Inc.
VOICE * DATA * CATV * CCTV * AUDIO
"Your Telecom & Data Communications Supplier"

Associated Telephone Industries Inc.
110-12855 Clarke Place • Richmond, BC Canada, V6V 2H9
Tel: (604) 270-0135 • Fax: (604) 270-7512 • Toll Free: 1 (888) 270-0135
www.associatedtelephone.com

AccentPLUS[®] 2

Unparalleled sound quality for flawless performance, every time.

For the truly discriminating listener, NuVo presents the opulent sound quality of the AccentPLUS[®]2 in-wall and in-ceiling speakers.

AccentPLUS[®]2 speakers bathe you in vivid, pristine sound with a richer bass response and enhanced performance. From smooth, dulcet highs to clean, precise mid-ranges to warm, robust bass tones, you'll hear each distinct note with astonishing clarity. Tailor-made for detailed sound execution at any volume and for an unparalleled listening experience in every area of your home.

AccentPLUS[®]2 Features:

- Durable butyl rubber surround
- 6.5 or 8 inch Dupont™ Kevlar® cone
- 30° pivoting titanium tweeter
- Enhanced 12 dB crossover
- Anti-debris basket
- Long throw magnet
- Paint friendly, low-profile aluminum grill

The rigid DuPont™ Kevlar® cone, with a special long throw magnet, composes an incredibly deep bass response, increasing intensity and heightening output. Pivoting titanium tweeter creates ultra crisp high definition for critical listening.



SYSTEM	NV-AP26C	NV-AP26CS	NV-AP28C	NV-AP26I	NV-AP28I
Description:	6.5" Ceiling Speaker with Co-axial Pivoting Tweeter	6.5" Stereo Ceiling Speaker with Dual Fixed Tweeter	8.0" Ceiling Speaker with Co-axial Pivoting Tweeter	6.5" In-Wall Speaker with Pivoting Tweeter	8.0" In-Wall Speaker with Pivoting Tweeter
Power Rating:	100W	100W	120W	100W	120W
Impedance:	8 ohm	8 ohm x 2	8 ohm	8 ohm	8 ohm
Efficiency:	91dB 1W/1M	91dB 1W/1M	92dB 1W/1M	91dB 1W/1M	92dB 1W/1M
Frequency Response:	50Hz-20kHz	50Hz-20kHz	40Hz-20kHz	50Hz-20kHz	40Hz-20kHz
Tweeter Crossover:	12dB / Octave; 4kHz	12dB / Octave; 4kHz	12dB / Octave; 3kHz	12dB / Octave; 4kHz	12dB / Octave; 3kHz
Woofer Crossover:	12dB / Octave; 4kHz	None	12dB / Octave; 3kHz	12dB / Octave; 4kHz	12dB / Octave; 3kHz
Dimensions (HxWxD):	9" Diameter x 3.75" (228mm Diameter x 96mm)	9" Diameter x 3.75" (228mm Diameter x 96mm)	10.75" Diameter x 4.375" (272mm Diameter x 112mm)	12" x 8.75" x 3.75" (306mm x 220mm x 95mm)	14.125" x 10" x 4" (358mm x 256mm x 101mm)
Cutout Dimensions:	8" (204mm)	8" (204mm)	9.75" (248mm)	11.125" x 7.75" (284mm x 198mm)	13.25" x 9.125" (336mm x 232mm)
Depth:	3" (75mm)	3" (75mm)	3.375" (86mm)	3" (75mm)	3.375" (86mm)
WOOFER					
Magnet:	10 oz (80 x 30 x 15mm)	10 oz (80 x 30 x 15mm)	20 oz (100 x 45 x 15mm)	10 oz (80 x 30 x 15mm)	20 oz (100 x 45 x 15mm)
Voice Coil:	1.0" (25mm) Polyimide Film	1.0" (25mm) Polyimide Film	1.5" (38mm) Polyimide Film	1.5" (25mm) Polyimide Film	1.5" (38mm) Polyimide Film
Cone:	DuPont™ Kevlar®	DuPont™ Kevlar®	DuPont™ Kevlar®	DuPont™ Kevlar®	DuPont™ Kevlar®
Surround:	Butyl Rubber	Butyl Rubber	Butyl Rubber	Butyl Rubber	Butyl Rubber
Dust Cover:	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene
TWEETER					
Magnet:	Neodymium	Neodymium	Neodymium	Neodymium	Neodymium
Dome:	20mm Titanium	2 x 13mm Mylar	25mm Titanium	20mm Titanium	25mm Titanium
Type:	Pivoting 30 degrees	Fixed Position	Pivoting 30 degrees	Pivoting 30 degrees	Pivoting 30 degrees



Associated Telephone Industries Inc.
 VOICE * DATA * CATV * CCTV * AUDIO
 "Your Telecom & Data Communications Supplier"

Associated Telephone Industries Inc.
 110-12855 Clarke Place • Richmond, BC Canada, V6V 2H9
 Tel: (604) 270-0135 • Fax: (604) 270-7512 • Toll Free: 1 (888) 270-0135
www.associatedtelephone.com